

# Propulsive Small Expandable Deployer System (ProSEDS): Preparing for Flight

Brian Gilchrist  
Space Physics Research Laboratory  
University of Michigan  
Ann Arbor, MI 48109-2143  
734-763-6230  
[brian.gilchrist@umich.edu](mailto:brian.gilchrist@umich.edu)

Judy Balance, Leslie Curtis, Les Johnson, Jason Vaughn, Ken Welzyn  
Marshall Space Flight Center  
National Aeronautics and Space Administration  
Huntsville, AL 35812

IEPC-01-240\*

**The Propulsive Small Expandable Deployer System (ProSEDS) space experiment will demonstrate the use of an electrodynamic tether propulsion system to generate thrust in space by decreasing the orbital altitude of a Delta II Expendable Launch Vehicle second stage. ProSEDS, which is planned on an Air Force GPS Satellite replacement mission in June 2002, will use the flight proven Small Expendable Deployer System (SEDS) to deploy a tether (5 km bare wire plus 10 km non-conducting Dyneema) from a Delta II second stage to achieve ~0.4N drag thrust. ProSEDS will utilize the tether-generated current to provide limited spacecraft power. The ProSEDS instrumentation includes Langmuir probes and Differential Ion Flux Probes, which will determine the characteristics of the ambient ionospheric plasma. Two Global Positioning System (GPS) receivers will be used (one on the Delta and one on the endmass) to help determine tether dynamics and to limit transmitter operations to occasions when the spacecraft is over selected ground stations. The flight experiment is a precursor to the more ambitious electrodynamic tether upper stage demonstration mission, which will be capable of orbit raising, lowering and inclination changes-all using electrodynamic thrust. An immediate application of ProSEDS technology is for the removal of spent satellites for orbital debris mitigation. In addition to the use of this technology to provide orbit transfer and debris mitigation it may also be an attractive option for future missions to Jupiter and any other planetary body with a magnetosphere.**

## Introduction

ProSEDS is an electrodynamic tether propulsion system space experiment. ProSEDS will fly in 2002 as a secondary payload on a Delta II Global Positioning System (GPS) replacement mission. ProSEDS is based on the flight heritage of the Small Expendable Deployer System (SEDS) deployer hardware. The SEDS deployer has flown successfully 4 times in space. The SEDS Deployer was flown on SEDS-1, SEDS-2, Plasma Motor Generator (PMG) and Tether Physics and Survivability (TIPS) experiment.

The ProSEDS project will be launched on the Delta second stage. After launch, the Delta stages I and III separate, and ProSEDS is delivered, on stage II, to its orbit of approximately 360km circular with a 36 +/-1 degree inclination. The ProSEDS data subsystem is activated only after stage II separation of the primary payload. Once the ProSEDS orbit is achieved, the endmass is kicked off of the Delta via a marmon clampband spring assembly. The endmass is deployed upward (away from the earth) with the 15km of tether attached. The first 10km of tether, which is connected to the endmass, is a nonconductive material which provides the gravity gradient force required to deploy the stiff conductive

---

\* Presented as Paper IEPC-01-240 at the 27<sup>th</sup> International Electric Propulsion Conference, Pasadena, CA, 15-19 October, 2001.  
Copyright © 2001 by Brian Gilchrist. Published by the Electric Rocket Propulsion Society with permission.

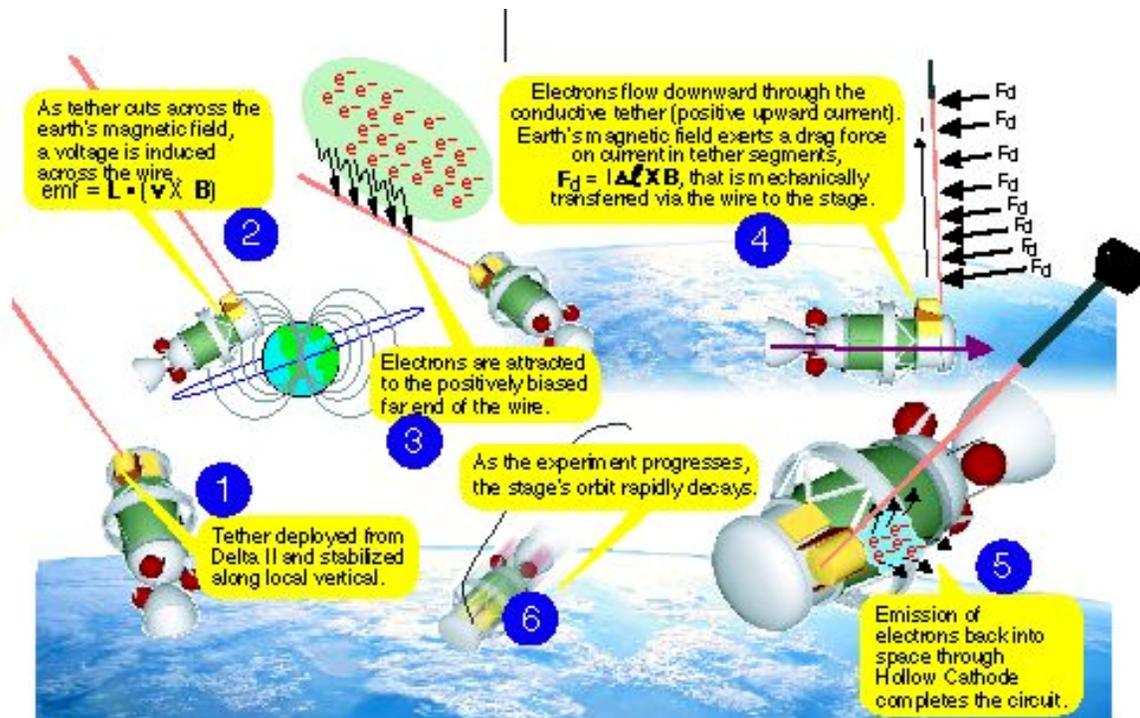


Figure 1 - ProSEDS Mission Overview.

wire out off the spool. The 5km of the of conductive tether remains attached to the Delta II. As the Delta second stage moves through space, electrons are collected from the plasma (Fig. 1). As a current is generated in the wire, the spacecraft passes through the earth's magnetic field, which exerts a force on the electrons flowing through the tether. The resulting force applied to the tether, is perpendicular to the velocity vector, which will cause the altitude of the Delta to decrease. The current flows through the tether, to the Delta stage, where it is used to power ProSEDS subsystems and recharge the secondary battery. A plasma contactor is used to emit electrons back into space to complete circuit. The Delta II stage, with ProSEDS attached, will continue it's orbit decay until it burns up upon reentry into the atmosphere. It has been calculated (Fig. 2) that the ProSEDS altitude should decrease at an average rate of 14 km per day due to the electrodynamic drag force generated in the tether [1]. The current collected in the tether is highly variable depending upon numerous factors including plasma density, solar activity, tether dynamics, and day/night transition cycles. ProSEDS will measure the tether current and the plasma density during all mission phases.

### Mission Objectives

The ProSEDS project has two primary and four secondary objectives. The first primary objective is to demonstrate significant, measurable electrodynamic tether thrust in space. This objective is accomplished by demonstrating that the tether generated electrodynamic thrust can lower the orbit of the stage by at least 5km a day. Simulation models have been developed to predict the orbit decay rate (Fig. 2). The second primary objective is to measure the current collection and be able to scale this collection to future applications. This objective is accomplished by measuring the plasma density and comparing it to the current generated in various ionospheric conditions. The data obtained in this primary objective will be applied to existing models, which will in turn be used to predict the performance of future tether missions. The primary objectives can be accomplished in the first 24 hours of the mission. One of the secondary objectives is the regulation, use, and storage of tether generated electrical power, which will be the first time that current generated in a bare wire will be used to power subsystems and recharge batteries. Another secondary objective will be accomplished by monitoring, measuring, and assessing the system performance during the extended mission phase (from

24 hours until mission end). The last two secondary objectives are to assess the tether survivability and its operational dynamics.

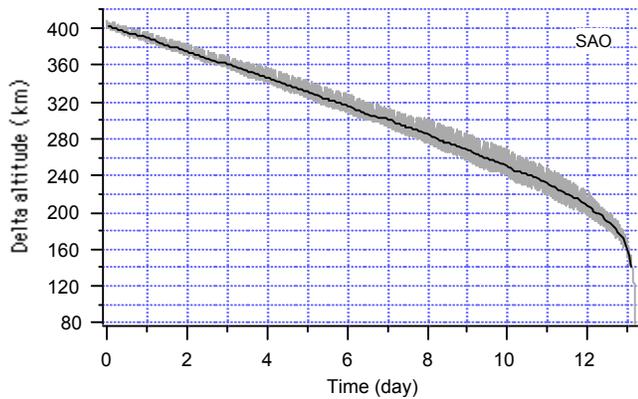


Figure 2 - ProSEDS Predicted Deorbit Rate (Data provided by Smithsonian Astrophysics Observatory).

### ProSEDS Subsystems

The major subsystems in the ProSEDS experiment are the deployer/tether subsystem, the endmass, the data subsystem, the power subsystem, and the performance instruments. All of these subsystems will be described in the following sections.

#### Deployer/Tether Subsystem

The Deployer is comprised of an aluminum canister that holds the 15km of tether wound around a core. The canister also houses phototransistors and infrared light emitting diodes that act as turns counters to monitor the length of tether that has been deployed. After the endmass is ejected, the brake is applied at various times during deployment to controls the deployment rate of the tether. The brake control law is a modification of what was used on previous SEDS mission. The control law has been tested numerous times during deployment testing of the tether in a vacuum chamber at Marshall Space Flight Center (MSFC). The control law and brake settings are preprogrammed into the data subsystem electronics box (DSEB) before launch because there is no uplink command capability. The Deployer subsystem is mounted to the guidance section of the Delta II via Boeing provided longerons and a bottom tube. The Deployer canister is mounted with the DSEB, GPS, ammeter, and the High Voltage Control and Monitoring (HVCM) relay box (Fig. 3). The Deployer

canister and brake subsystem was designed and fabricated by Tether Applications.

The design of the tether for the ProSEDS experiment was based on analysis of the space environment for the experiment including the ionospheric plasma conditions, meteoroid and orbital debris, natural thermal environments, radiation and solar conditions, and atomic oxygen. System trades were performed on tether lengths and materials, and many tests were conducted of various material and tether samples to finalize the design. In addition to trades and analysis on the tether performance, the decision to use the SEDS flight proven hardware provided several constraints to the tether design. These constraints included volume limitations of the canister and mass limitations of the canister and support structure.

Since previous tether missions had successfully deployed non-conducting tethers of 20 km lengths from SEDS hardware, the decision to use a 10 km non-conducting tether for initial deployment and for tether stabilization was made. The one change that was made was to use a flat (1.2 mm x 0.16 mm) braided tether instead of a cylindrical tether to improve the survivability of the non-conducting tether in case of impact with a micro-meteoroid particle.

An analysis of the ionospheric plasma conditions that would be present in space during the mission was conducted to determine the electromotive force (EMF) that could be generated by various lengths and sizes of metallic tether. The outer diameter of the conductive tether needed to be around 1.2 mm in order to provide the needed current collecting area while fitting the volume constraints of the SEDS canister. Lengths that were considered were 3, 4, and 5 km. It was determined that a length of 5 km would be required to generate a tether current of 3 A. Shortening the tether to save system mass would lower the current collection capability of the system and limit the demonstration of the electrodynamic tether generated forces. The maximum value of tether generated EMF for ProSEDS is predicted to be 1400 V, which will provide an ample demonstration of the electrodynamic tether thrust capability of tethers.

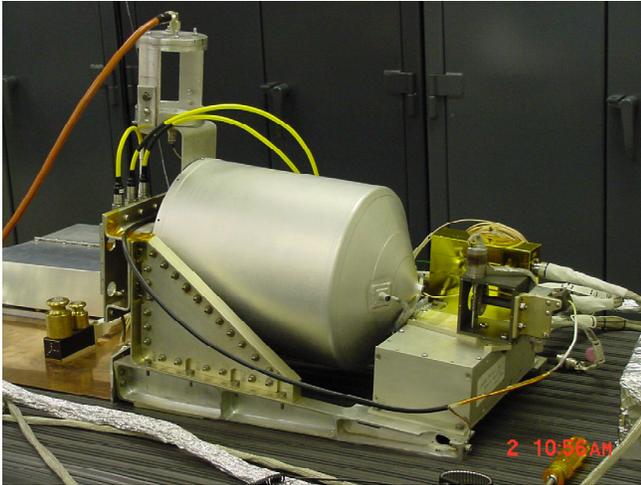


Figure 3 - ProSEDS Deployer Mounted Subassembly.

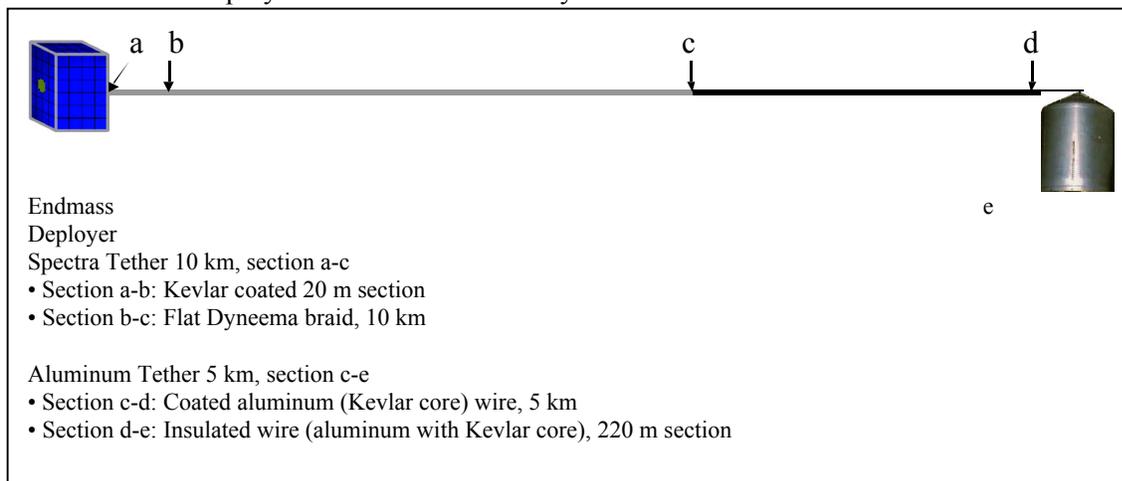


Figure 4 - ProSEDS Tether and Deployer.

The tether length is 15 km and it is comprised of three different tether sections (Fig. 4). The tether diameter is different for each section ranging from 0.8mm to 1.6mm. The tether has 10 km of nonconductive tether, which is made of a Dyneema braid that is 13/100 denier. The nonconductive tether is used to provide the gravity gradient forces required to pull the wire tether off of the canister core. The 4840m of conductive tether is made of seven strands of 28 AWG 1350-0 aluminum wire which has been coated with an atomic oxygen resistant conductive polymer coating. Each wire is individually coated then twisted around a kevlar core. The last 220 meters of tether that connects to the Delta II is the same seven strands of the aluminum wire that have been coated with both a polyimide and an atomic oxygen resistant insulation. The Kevlar R (DuPont) core is in the center of the entire length of the wire tether (both conductive and

insulated). A Kevlar overbraid covers the insulated tether portion and the interface to the endmass. This overbraid provides additional protection against surface abrasion. The insulated tether is required close to the Delta II stage to ensure that accurate measurements of the plasma generated current are obtained and that there is no arcing close to the Delta. The three sections of the tether are joined by splices and cold butt welds, which have been tested to ensure that the tether has a minimum breaking strength of 250 N. The tether was fabricated and processed by Tether Applications, Cortland Cable and Triton.

#### **Endmass (Icarus)**

The ProSEDS Endmass weighs approximately 20 kg and is ejected from the Delta II via a Boeing provided

marmon clampband and a set of pyrotechnic bolts. When ProSEDS reaches its designated orbit, the Delta II sends a signal to fire the pyrotechnic bolts and eject the endmass upward away from the Delta II stage at an initial rate of 2.8 meters per second. The endmass acts to pull the tether off the core during deployment. In addition, the endmass helps dampen the tethers' dynamic motion. The nonconductive tether is attached to the endmass and it in turn is attached to the conductive tether.

The endmass has its own set of instrument that are activated at deployment. The endmass has a GPS receiver for location and tether dynamics information and an aspect magnetometer for attitude information. It also includes a command and data handling system, silicon solar cells, a rechargeable battery, and a transmitter. The endmass is not electrically connected to the rest of the ProSEDS hardware that remains attached to the Delta. The downlink rate for the endmass is 115.2 kilobits per second and the frequency is 2247.5 MHz. The GPS location information will also be used to turn-on the transmitter when it is within range of designated ground stations. Solar cells, that are located on all sides of the endmass, will provide power to recharge the nickel-cadmium (Ni-Cd) batteries and all of the instruments. The data gained from the endmass will be used to help assess tether dynamics. The endmass was designed and fabricated by a student team from the University of Michigan (Fig. 5) and was named Icarus by the students.

#### **Data Subsystem**

The data subsystem is comprised of a data subsystem electronics box (DSEB) and a transmitter. The DSEB provides the computer control for the entire mission. The ProSEDS experiment has no uplink capabilities so all of the mission control must be programmed into the system before launch. The DSEB provides computer control and receives data from all ProSEDS hardware except the endmass. The data is formatted into a data stream and sent to the transmitter for downlink, when ProSEDS is over a designated ground station. The DSEB also activates and controls all of the hardware on the essential and nonessential power buses via discrete and analog interfaces. The DSEB is a modification of the data system used successfully on the SEDS missions. The ProSEDS mission timeline is controlled by the DSEB and operation is divided into two phases, a deployment phase, and an operations

phase. During the operations phase the hardware is cycled in four modes, which include sampling of the plasma conditions, plasma contactor operation, and battery recharge, and battery recovery. The DSEB is mounted on the Deployer subassembly (Fig. 3). The DSEB is designed and fabricated by Alpha Technology and MSFC. Data is downlinked via a commercial off the shelf transmitter through a Delta provided four-port coupler and antenna system. The transmitter is mounted on the ProSEDS instrument panel assembly (Fig. 6). During the first three orbits the transmitter will operate continuously. After the first three orbits, if proper operation of the GPS has been confirmed, then the transmitter is turned on only over designated ground stations. If the GPS normal operation can't be verified then the transmitter will remain on continuously throughout the mission. The RF transmission license agreement requires that the transmitter be deactivated after 21 days on orbit. The ground stations that ProSEDS will use are Wallops, Guam, Hawaii, Madrid, Santiago, Goldstone, and Canberra.

#### **Power Subsystem**

The ProSEDS power subsystem consists of a primary battery, secondary battery, power distribution box (PDB), high voltage control and monitoring (HVCM) system and a hollow cathode plasma contactor. The primary battery provides power during deployment and the first seven orbits. The primary battery is a 50 Ampere-hour (A-hr) lithium thionyl chloride (Li-SOCL<sub>2</sub>) bromine complex battery. The primary battery is not rechargeable. The primary battery cells are DD size mounted in two parallel strings of eight cells each. The nominal battery voltage is 28Vdc and the battery design contains blocking diodes, shunt diodes and fuses that make them two-fault tolerant. The primary battery, which is mounted on the ProSEDS instrument panel (Fig. 6), was designed and fabricated by MFSC.

The ProSEDS secondary battery is a rechargeable 2.3 A-hr nickel cadmium (Ni-Cd) battery. The battery will be recharged entirely from the current collected in the tether as the spacecraft moves through the space plasma. The secondary battery contains 100 cells mounted in four cell packs. The battery recharge cycle is controlled by the DSEB. The secondary battery, which is mounted on the instrument panel (Fig. 6), was fabricated and designed by MSFC.

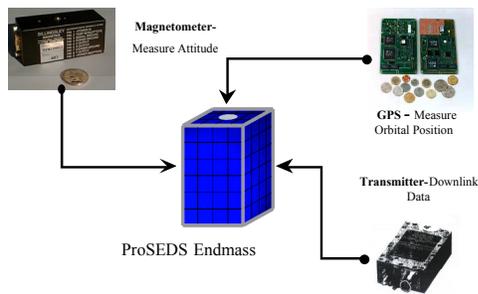


Figure 5 - ProSEDS (Icarus) Endmass.

The Power distribution box (PDB) provides two redundant relays that interface to the Delta II for ProSEDS activation. The Delta II activates ProSEDS only after the primary payload has been delivered to it's orbit and the third stage has been ejected from the spacecraft. The PDB provides "Turn On" power to the DSEB which in turn activates the rest of the hardware on the essential and non-essential buses. The PDB, which is mounted on the instrument panel (Fig. 6), was designed and fabricated by MSFC.

The High Voltage Control and Monitoring (HVCM) System consist of a relay box, a resistor box and an ammeter. The HVCM relay provides control and monitor functions for the tether current. The HVCM provides three high voltage relay switches that switch the tether current between open, short, resistor box and the secondary battery.

These switches are controlled by the DSEB and are a part of the four modes of operation. A separate resistor load box is used during voltage measurements. An ammeter, which is mounted at the exit guide of the brake box (Fig. 3), is used to measure direct tether current. The HVCM relay box is mounted under the deployer canister (Fig. 3) and the resistor box is mounted on the Delta struts. The University of Michigan designed and fabricated the HVCM.

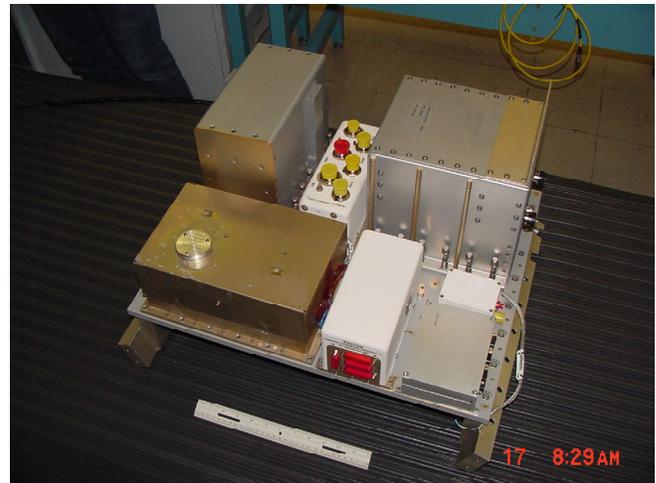


Figure 6 - ProSEDS Instrument Panel Assembly.

The Hollow Cathode Plasma Contactor (HCPC) functions to maintain current flow in the tether by collecting and emitting electrons back into the ionosphere. This essentially completes the circuit so tether current will flow to the Delta II. The plasma contactor should also prevent spacecraft charging, which could induce plasma effects such as arcing and sputtering. The HCPC generates a dense plasma cloud by ionizing Xenon, which allows for a low emission of electrons back into space. The ProSEDS HCPC utilizes a small Xenon gas tank and flow system with a specially designed hollow cathode. The HCPC, which was designed and fabricated by the Electric Propulsion Lab, is mounted on the instrument panel (Fig. 6).

### ProSEDS Instrumentation

The instrumentation on ProSEDS consist of the following: a Langmuir Probe Spacecraft Potential (LPSP); a Differential Ion Flux Probe with Mass (DIFP/M); a magnetometer; and a GPS receiver with antenna. This instrumentation is required to accomplish the ProSEDS primary and secondary objectives as described in the following sections:

The LPSP main function is to measure plasma characteristics. The LPSP is required to accomplish the ProSEDS second primary objective, which is to scale the ProSEDS results for future missions. The amount of tether current collected is due to the plasma density and the LPSP determines the plasma electron density and electron temperature. Another function of the LPSP is to measure the potential of the Delta II stage with respect to the surrounding plasma. The LPSP is composed of an electronics box and three Langmuir

probes assemblies. Each LPSP probe is mounted on the tip of a ~ 0.8m mast. The LPSP masts are mounted onto the Delta II struts at ~ 120 degrees apart, and extended via a pin puller/pivot mechanism. The extension of the LPSP probes away from the Delta II allows for measurement of ambient plasma conditions. The LPSP electronics box is mounted to the instrument panel (Fig. 6). The LPSP was designed and fabricated by the University of Michigan.

The DIFP/M is used to measure non-equilibrium and ambient plasma characteristics. The DIFP/M will measure plasma density, spacecraft potential, ion mass and ion temperature. With its ion mass capability, the DIFP/M will determine if the measurements being made of the local plasma are true ambient plasma conditions or if they are contaminated by spacecraft emissions. The DIFP/M is composed of an electronics box and three probes that are mounted ~ 120 degrees apart on the Delta II struts. Since the Delta attitude is not controlled, both the DIFP/M and LPSP probes are mounted at intervals around the Delta to insure that one probe will always be in the ram direction. The DIFP/M was designed and fabricated by MSFC.

The ProSEDS magnetometer is used to correctly determine the spin-phase attitude of the Delta II. The Delta stage is free to rotate around the tether axis during the mission so the attitude must be measured. The aspect magnetometer will measure spacecraft attitude with respect to the geomagnetic field as well as the magnitude of the field. The magnetometer is a MSFC provided commercial off the shelf instrument that is mounted to a strut.

The GPS receiver and antenna are used to determine the position of the Delta and to measure the system orbital decay rate. Another function of the GPS will be to determine when ProSEDS is over an assigned ground station so that the transmitter can be activated to downlink ProSEDS data. The GPS determination of ground station location will be utilized to save power when the ProSEDS is out of range from the ground stations. If the GPS does not function properly then the default mode is to leave the transmitter on continuously. The tether dynamics are not controlled, thus the tether will be moving due to the electrodynamic force and other factors such as day/night transitions. An identical GPS unit is mounted in the endmass so that a determination of

tether dynamics can be made. Although the two GPS units may not be locked to the same set of satellites, useful tether dynamics data will be obtained. The GPS receiver and antenna are mounted with the ProSEDS deployer canister (Fig. 3). The GPS receiver card is a commercial off the shelf technology but the software and the power supply board were developed and fabricated by Alpha Technology and MSFC.

### **ProSEDS Testing and Integration**

ProSEDS must meet all of the launch loads and safety requirements for the Delta II spacecraft. The majority of ProSEDS hardware is protoflight, which means that it is undergoing a series of environmental tests at levels above those expected for flight and then be flown. A full series of system level environmental testing are being conducted at MSFC to include the following; vibration, shock, high voltage, functional, thermal vacuum, thermal balance, electromagnetic interference and electromagnetic compatibility. A full systems test with all flight hardware is being prepared with operation of the hardware through the complete mission profile. Integration checkout tests have recently been completed in preparation for the full systems tests. Deployment test of the 15 km tether will also be conducted in a vacuum chamber under extreme temperature conditions. The Delta II second stage has been modified for the ProSEDS hardware to mount to the guidance section and the struts. Modifications of the stage include the addition of plume shields; installation of instrument panel and deployer longerons; installation of the marmon clampband assembly; and mounting holes added to the struts. A fit check of flight hardware has already been completed on the Delta II stage at KSC to ensure interface compatibility. Once all of the environmental and functional testing is complete, the hardware will be shipped to Kennedy Space Center (KSC) for integration onto the Delta II. ProSEDS will be integrated onto the second stage on the launch pad and interface and limited functional test will be conducted prior to launch.

### **Summary**

The ProSEDS tether experiment will be flown in 2002. ProSEDS will utilize a conductive wire tether to generate electrodynamic propulsion and onboard

power. ProSEDS will demonstrate propellantless propulsion of the Delta II stage by collecting electrical current from the space plasma as the tether interacts with the earth's magnetic field. Electrodynamic tether propulsion technology has many useful future applications including satellite de-orbit, upper stages, and satellite reboost. Electrodynamic tethers can be used to generate power at Jupiter or any other planet with a magnetosphere.

### **Acknowledgements**

The authors wish to recognize the hard and dedicated work of the entire ProSEDS team.

### **References**

[1] Estes, R. and Lorenzini, E., private ProSEDS communication, 2000.